

CERTIFICATES OF COMPETENCY IN THE MERCHANT NAVY  
MARINE ENGINEER OFFICER

STCW 78 as amended SMALL VESSEL CHIEF ENGINEER <3000 GT, <9000 kW UNLIMITED

058-12 - GENERAL ENGINEERING SCIENCE II

FRIDAY, 15 MARCH 2024

1400 - 1600 hrs

Materials to be supplied by examination centres

Candidate's examination workbook  
Graph paper

Examination Paper Inserts

[Empty box for Examination Paper Inserts]

Notes for the guidance of candidates:

1. Examinations administered by SQA on behalf of the Maritime & Coastguard Agency.
2. Candidates are required to obtain 50% of the total marks allocated to this paper to gain a pass **AND** also obtain a minimum 40% in Sections A and B of the paper.
3. Non-programmable calculators may be used.
4. All formulae used must be stated and the method of working and ALL intermediate steps must be made clear in the answer.



Maritime &  
Coastguard  
Agency



## GENERAL ENGINEERING SCIENCE II

Attempt ALL questions.

Marks for each question are shown in brackets.

### Section A

1. An aluminium vessel has a mass of 3 kg and contains 2 kg of water at a temperature of  $12^{\circ}\text{C}$ . A further 5 kg of water at  $40^{\circ}\text{C}$  is added to the vessel and there are no heat losses.
- Calculate the final temperature of the vessel and water. (8)
- Note: the specific heat capacity of aluminium =  $0.95 \text{ kJ/kgK}$   
the specific heat capacity of water =  $4.18 \text{ kJ/kgK}$
2. (a) State Charles's Law for a perfect gas. (2)
- (b) A perfect gas at a pressure of 2.4 bar and temperature  $44^{\circ}\text{C}$  is heated until the volume is 60 litres with temperature of  $194^{\circ}\text{C}$  at constant pressure. 2.4
- Calculate EACH of the following:
- (i) the original volume of the gas in  $\text{m}^3$ ; (4)
- (ii) the mass of gas. (2)
- Note: for the gas  $R = 0.29 \text{ kJ/kgK}$
3. With regard to the performance of a diesel engine, define EACH of the following terms, stating the formula for calculating the values of such:
- (a) indicated power; (2)
- (b) brake power; (2)
- (c) brake specific fuel consumption; (2)
- (d) power loss to exhaust. (2)

4. (a) State TWO important thermodynamic properties of refrigerants, explaining their importance. (4)
- (b) State the condition of the refrigerant, at the FOUR key points in a simple refrigeration circuit. (4)

5. Butane ( $C_4H_{10}$ ) is completely burned in 25% excess air by mass.

Calculate EACH of the following:

- (a) the mass of carbon dioxide in the exhaust gases per kg of fuel; (5)
- (b) the mass of nitrogen in the exhaust gases per kg of fuel. (5)

6. (a) Explain what is meant by EACH of the following terms:

(i) specific heat capacity; (2)

(ii) specific enthalpy of evaporation. (2)

(b) 10 kg of liquid at  $20^\circ C$  has 1950 kJ of heat transferred to it raising its temperature to  $85^\circ C$ .

Determine the specific heat capacity. (4)

**Section B**

7. A conductor of 12.5 mm diameter carries a current of 30 A when it is at right angles to a magnetic field. The conductor has an effective length of 600 mm in the magnetic field and experiences a force of 28 N.

Determine EACH of the following:

- (a) the flux density; (4)
- (b) the magnetic flux. (4)

8. An electric heater operated from a 230 V supply has a heating element comprising of two  $30 \Omega$  coils. The coils may be connected in series or in parallel to give different outputs.

Determine EACH of the following:

- (a) the power output for the series connection; (4)
- (b) the power output for the parallel connection. (4)

9. (a) Name TWO sources of electricity; (2)
- (b) Explain what happens to the electrical resistance of most metals as the temperature rises. Briefly explain why this occurs. (3)
- (c) Explain what characteristic of the atomic structure of insulators makes them bad conductors of electricity, give two examples. (3)

10. The circuit shown in Fig Q10 has a 250 V d.c. supply.

Determine EACH of the following:

(a) the total resistance of the circuit;

(3)

(b) the total current supplied;

(1)

(c) the volt drop across the 800Ω resistor.

(4)

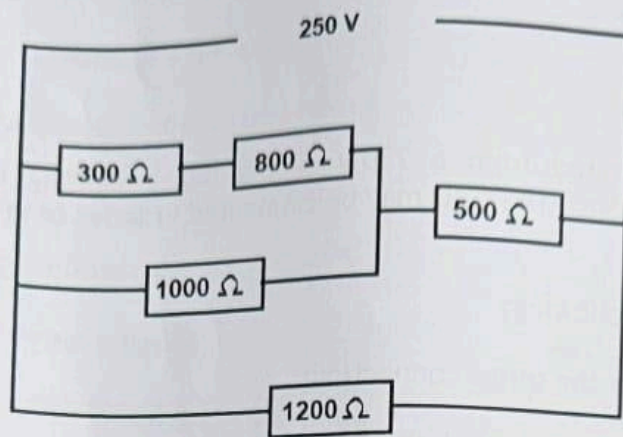


Fig Q10

11. A ship has a displacement of 25500 tonne.

Determine the distance a mass of 82 tonne, already on board, must be moved off the centreline to cause the ship to heel by exactly 1°.

(8)

Note:  $m \times d = \Delta GM \tan \theta$  and that  $KM = 6.2$  m, and  $KG = 5.3$  m.

12. A water tank is 4 m high and 4 m wide. The amount of water in the tank is measured using a pressure transducer in the base of the tank.

Determine EACH of the following:

(a) the thrust on the front face of the tank when it is filled to within 0.5 metre of the top;

(5)

(b) the pressure indicated on the transducer, in kilopascals, when the tank is half full.

(5)

Note: The density of water is 1000 kg/m<sup>3</sup>