

GENERAL ENGINEERING SCIENCE II

Attempt ALL questions

Marks for each question are shown in brackets.

Section A

- ~~X~~ A quantity of Air has a volume of 1.3 m^3 at 4.5 bar and an initial temperature of 25°C . The Air is heated in its vessel until the pressure reaches 1.75 MN/m^2 , the volume is unchanged.

Determine EACH of the following:

- ~~(a)~~ the mass of Air; (4)
- ~~(b)~~ the final temperature of the Air. (4)

Note: the characteristic gas constant for air has a value of 290 J/kgK .

- ~~X~~ During a heat treatment process a steel component with a mass of 8 kg is cooled from a temperature of 400°C by being completely immersed in a tank containing 12 kg of oil which was originally at a temperature of 20°C .

Assuming there are no heat losses from the tank calculate the final equilibrium temperature of the oil and the steel component. The effect of the tank can be ignored.

*Note: specific heat capacity of steel = 0.48 kJ/kgK
specific heat capacity of oil = 1.8 kJ/kgK* (8)

- ~~X~~ The following parameters may be determined during the analysis of a diesel engine.

Define EACH of the following terms and state a formula for calculating the values of each:

- ~~(a)~~ indicated power, indicating reason for variations between 2 & 4 stroke cycles; (2)
- ~~(b)~~ shaft power; (3)
- ~~(c)~~ Engine mechanical efficiency indicating reasons for losses; (3)
- ~~(d)~~ Power loss to exhaust. (2)

~~7~~ (a) Describe how changes of state occur without change in temperature. (4)

~~8~~ (b) A metal component with a mass of 1.15 kg at 600°C is quenched by immersion in 5 kg of water at 20°C. The combined final temperature of the water and metal is 36°C.

Determine the Specific Heat Capacity of the metal. (4)

Note: the Specific Heat Capacity of water is 4.18 kJ/kgK.

~~9~~ Butane (C_4H_{10}) is completely burned in 30% excess air by mass.

Determine EACH of the following:

~~(a)~~ the mass of carbon dioxide in the exhaust gases per kg of fuel; (4)

~~(b)~~ the mass of nitrogen in the exhaust gases per kg of fuel. (4)

Note: Assume air to be 23% Oxygen and 77% Nitrogen

~~10~~ (a) State TWO thermodynamic and two general properties required of a good refrigerant. (4)

~~(b)~~ For the FOUR key points in a simple refrigeration circuit state the physical condition of the refrigerant including relative temperature and pressure (4)

Section B

- ~~X~~ (a) Briefly describe the principal molecular characteristic of materials that differentiates those that conduct electricity well from those that do not. (2)
- (b) State examples of an electric current being used for EACH of the following:
- ~~(i)~~ its magnetic effect; (2)
 - ~~(ii)~~ its chemical effect; (2)
 - ~~(iii)~~ its heating effect. (2)
- ~~X~~ (a) State the THREE main effects of an electric current. (3)
- (b) State TWO practical examples of EACH effect in Q8(a). (2)
- ~~(c)~~ List THREE means by which electricity may be produced. (3)
- ~~9.~~ (a) Explain how does the resistance of metals change as there temperature decreases; (2)
- (b) Give an example of where the changing property described in Q9a is used; (2)
- ~~(c)~~ Determine the total resistance across a,b in the circuit shown in FIG Q9: (4)

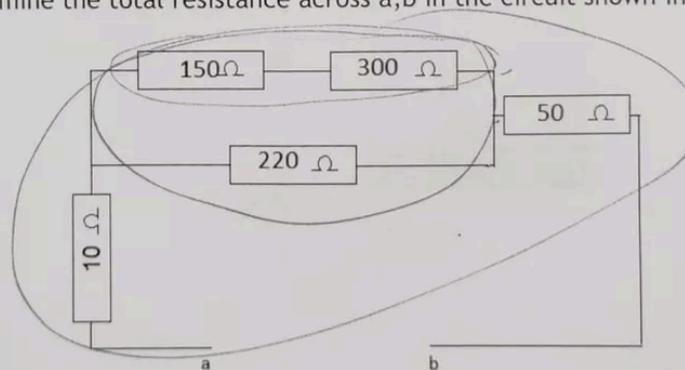


FIG Q9

10. (a) In a moving coil instrument explain the purpose of a shunt resistor. (2)
- ~~X~~ (b) Describe with the aid of a diagram, the operation of a moving coil instrument. (6)

11. A ship has a displacement volume of 7500 m^3 in sea water.

Calculate the mass, m , which when loaded on the centre line at a K_G of 4.8 m will cause a change of $+0.25 \text{ m}$ in the position of the ship's centre of gravity.

Note: $K_G = 3.5 \text{ m}$ and density of sea water = 1025 kg/m^3 (8)

12. A tank has a round inspection hatch 700 mm diameter situated as shown in FIG Q12. The tank is filled to a height of 4.5 m with seawater.

Determine EACH of the following:

(a) The pressure at the centre of the hatch. (2)

(b) The thrust on the hatch. (4)

(c) Was the pressure calculated in 12a(i) an absolute pressure or a gauge pressure. (2)

(d) Describe the difference between absolute and gauge pressure. (2)

Note: the density of seawater is 1025 kg/m^3

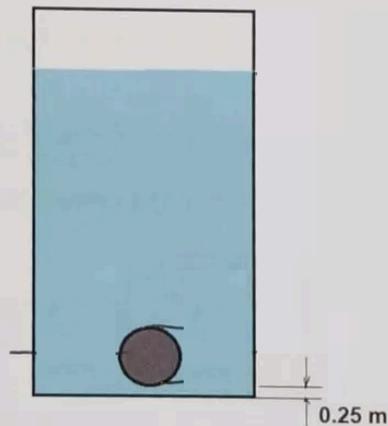


FIG Q12